Quantifying the Impact of Antineutrino Detection on IAEA Safeguards Using the LISSAT Approach



This project is a joint collaboration between Lawrence Livermore and Sandia National Laboratories

Howard Lambert Adam Bernstein

Lawrence Livermore National Laboratory

September 26, 2006

The views expressed are those of the authors and not necessarily those of the United States Government.



This work was performed under the auspices of the U.S. Department of Energy by the University of California, Lawrence Livermore National Laboratory under Contract No. W-7405-Eng-48.



Talk Overview



- We are working to quantify and compare the effectiveness of different safeguards approaches
- Quantitative analysis of diversion scenarios is a key part of this effort
 - we use LISSAT for systems analysis Lawrence Livermore National Laboratory Integrated Safeguards System analysis tool
- We have analyzed one simple scenario with a PWR to illustrate the LISSAT Method
- Our ultimate goal is to directly compare antineutrino detection with other methods and identify the most suitable deployment strategy





LISSAT Analysis Outline



- Chose one diversion scenario to illustrate the LISSAT method
- Run reactor at 5% higher power than declared
 for the following two cases
 - With current IAEA safeguards
 - With current IAEA safeguards and antineutrino detectors
- Calculate the reduction of the diversion path non detection probability with an antineutrino detector in pace





Current IAEA Safeguards Methods for Reactors



- Coded tags and seals placed on fuel assemblies, and measures such as video surveillance of spent fuel ponds and nondestructive assay.
- Methods do not provide real-time quantitative information about the reactor core power level and isotopic composition





Example Scenario – Timeline for Running Reactor at Higher than Declared Power



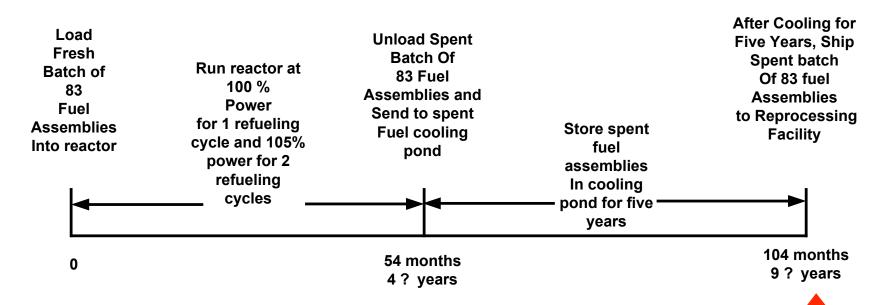


Fig. 2 -- Time Line for Unreported Plutonium Production by Running Reactor at 105% for two Refueling Cycles

Diversion of Additional 8 kg of Pu generated at higher power occurs at the reprocessing plant






Antineutrino Count Rate – with and without 5% shift in power (Reactor Simulation)



Anti neutrino events

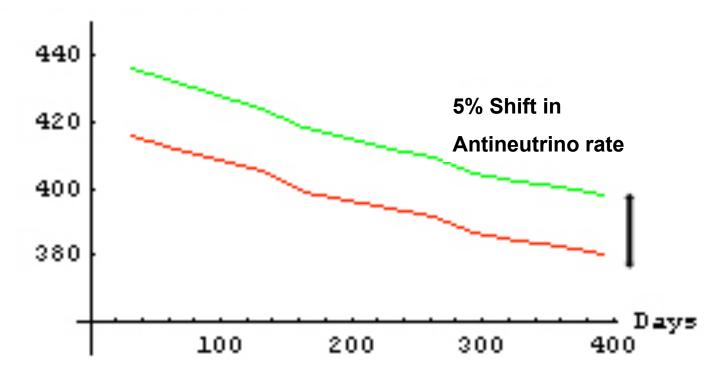


Antineutrino rates arising from a standard PWR core in an "equilibrium" cycle (ORIGEN simulation using the NRC San Onofre Final Safety Analysis Report for input isotopics)






LLNL Integrated Safeguards System Analysis Tool (LISSAT)

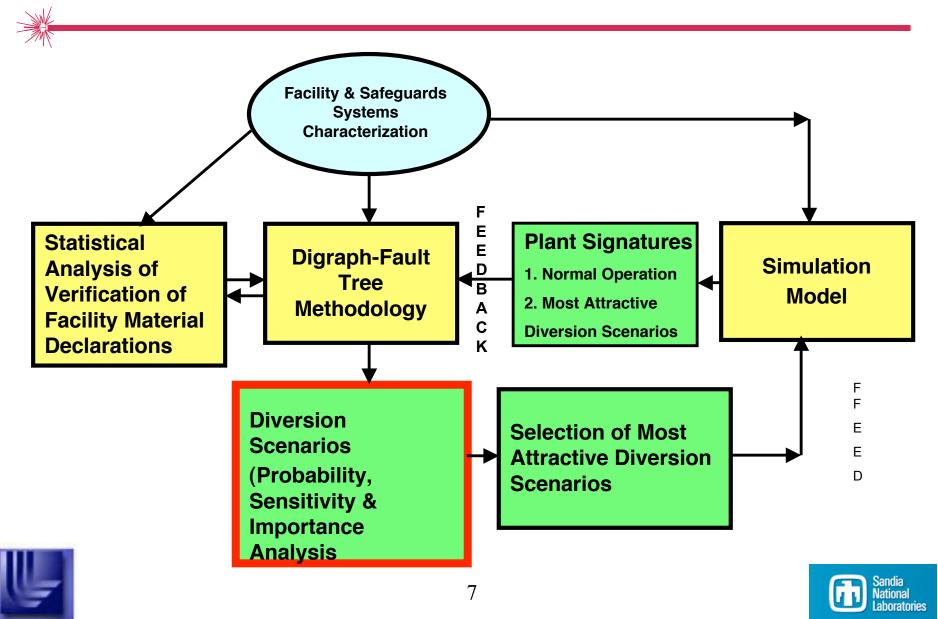

Flow of Information Regarding **Detection Paths in the Digraph**




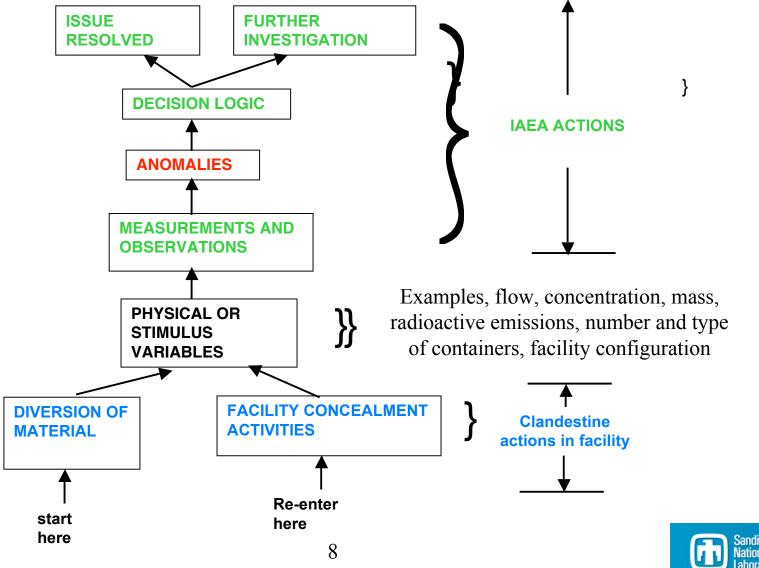





Pump System Analogy for Digraph-Fault Tree Methodology

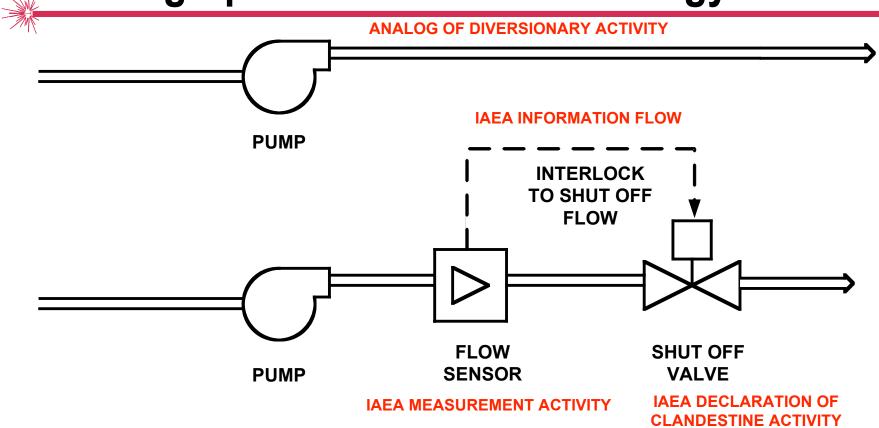


- 1. What are the diversionary activities e.g. removal of material, concealment
- 2. How are these activities detected?
- 3. How can detection fail so that diversion goes undetected?






Step 1 – Production of Pu at Reactor and Removal of Pu at Reprocessing Plant

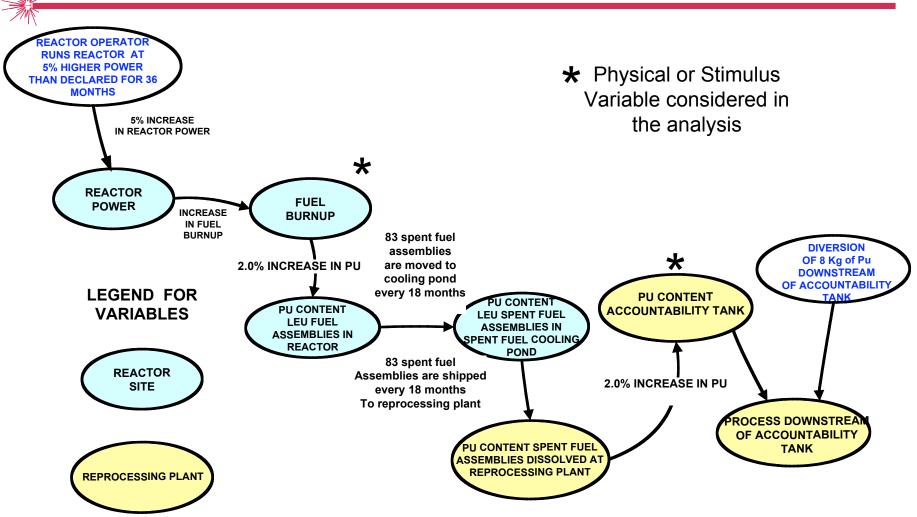






Step 2 – Include IAEA Detection Paths

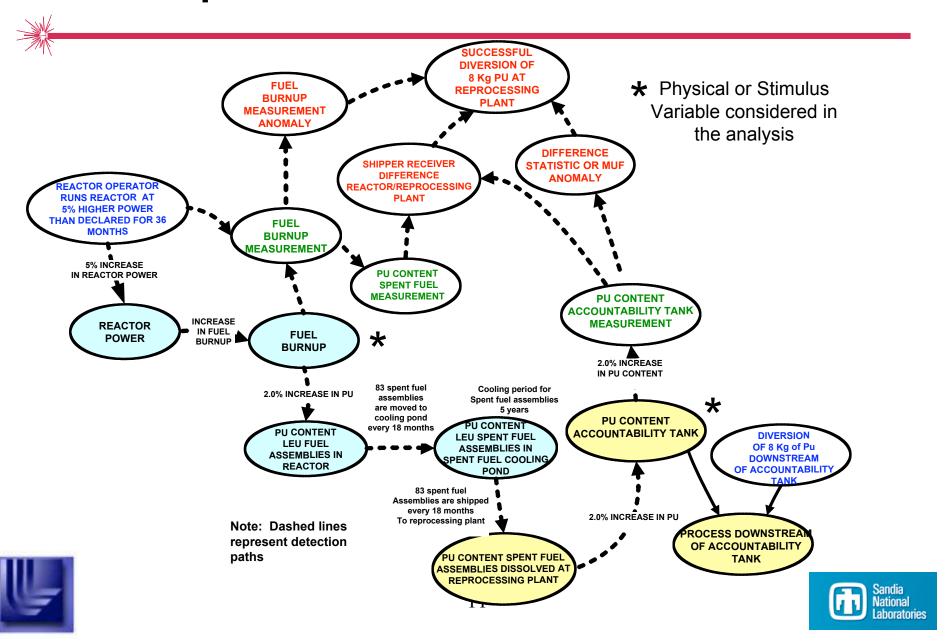


Step 3 – Include Failures so that Anomalies are not detected



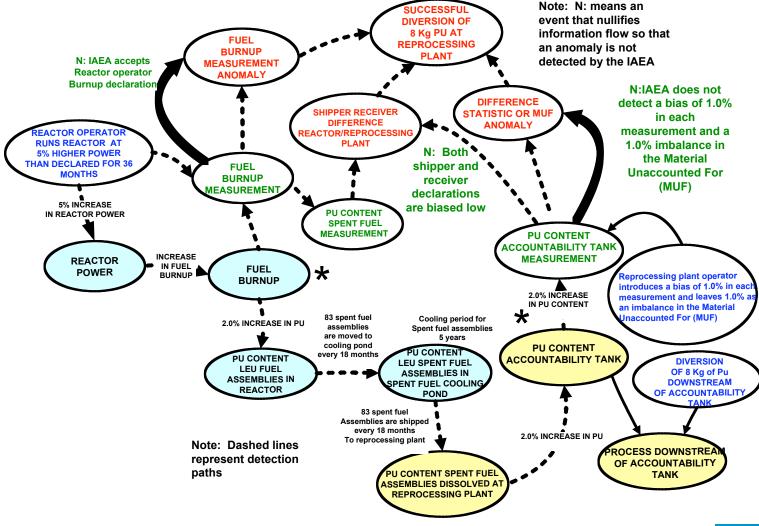





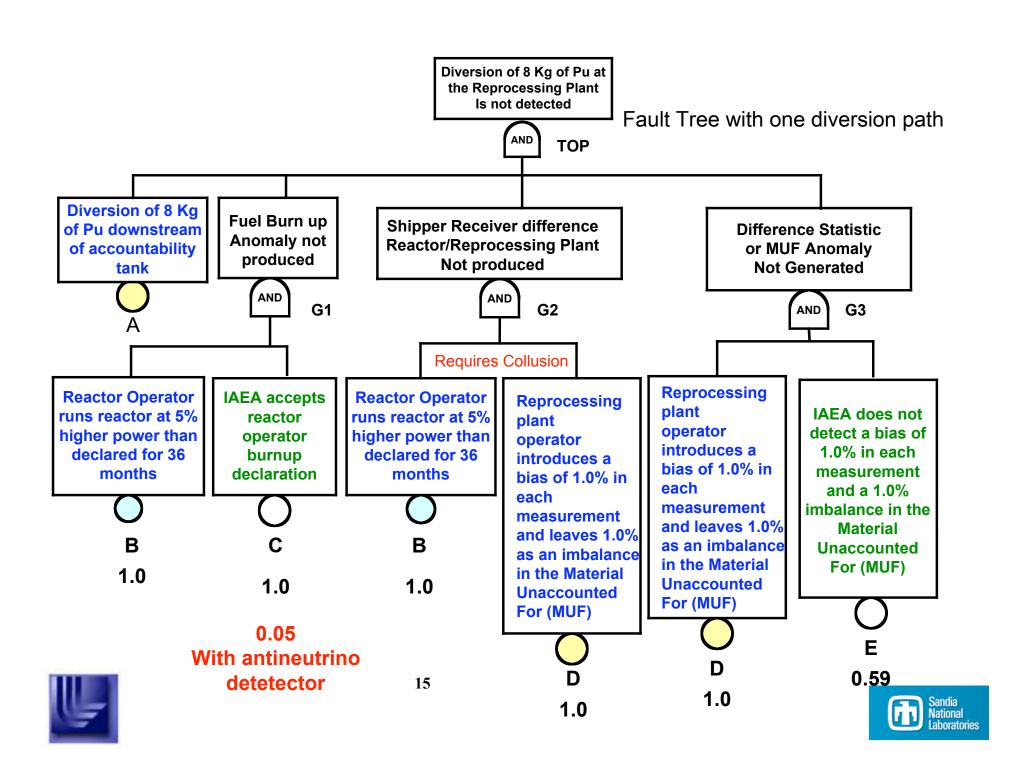

Diversion Path with probabilities indicated



- A. Diversion of 8 kg of Pu downstream at accountability tank (1.0)
- B. Reactor operator runs reactor at 5% higher power than declared for 36 months (1.0) (early detection of anomaly is possible with antineutrino detector)
- C. IAEA accepts reactor operator burnup declaration corresponding to 100% reactor power (1.0) (<0.05)
- D. Reprocessing plant operator introduces a bias of 1.0% in each measurement and leaves 1.0% as an imbalance in the Material Unaccounted For (MUF) (1.0)
- E. IAEA does not detect a bias of 1.0% in each measurement and a 1.0% imbalance in the MUF (0.59)

Probability Reduction with Antineutrino Detector



- •Without an antineutrino detector, the probability of nondetection is **0.59** (=Prob (Event E))
- •If antineutrino detectors are employed, event C will have a lower non-detection probability. With the current prototype, the probability that the antineutrino detector will not detect a 5% reactor power increase during 36 months is <0.05. (=Prob(Event C))
- •With an antineutrino detector, the probability of successful diversion probability is <0.03 (=Prob(Event C) x Prob (Event E).
- •The **reduction** in the non-detection probability is then

$$1/Prob(Event E) = >20.$$





Conclusions



- We are using proven systems analysis techniques for safeguards effectiveness assessment
- Generation of the diversion paths using the digraphfault tree technique provides a systematic basis on which to assess safeguards effectiveness with and without antineutrino detectors (i.e. with current IAEA safeguards practices.)
- The preceding example is intended only to illustrate our comparison technique further work (as described in the paper) is underway to identify additional scenarios in which antineutrino detectors may provide the most benefit



